






200X1200MM



Veneer
SERIES



2. I heard the
Auxiliary entrance
Filling the serene life, to
There are always memories

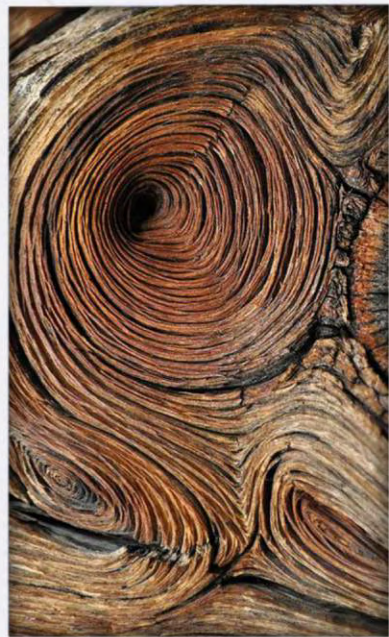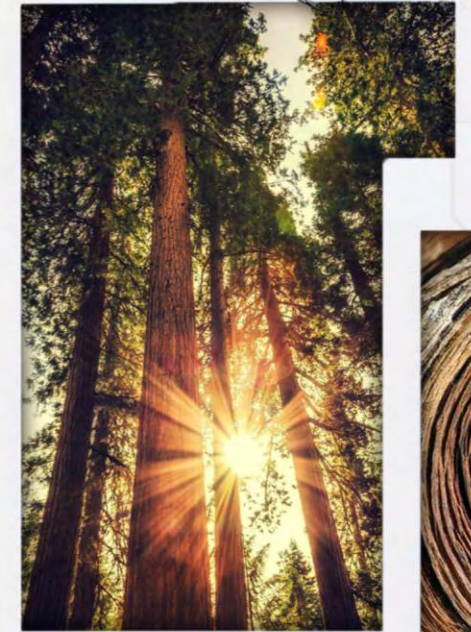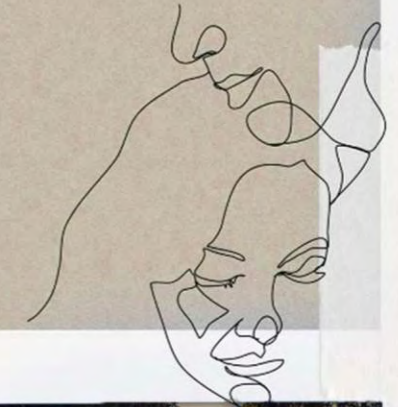



200x
1200MM






SOLUTION TO ALL YOUR DESIGN NEEDS.

Geo Gres offers a complete solution for porcelain floors and walls that consist of excellent technical performance and unique aesthetic appeal.

The variety and complete range of Geo Gres porcelain meets your needs of contemporary planning for indoor and outdoor design solution.

THE FINEST WOODWORK FOR THE FINEST LIVING.

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.

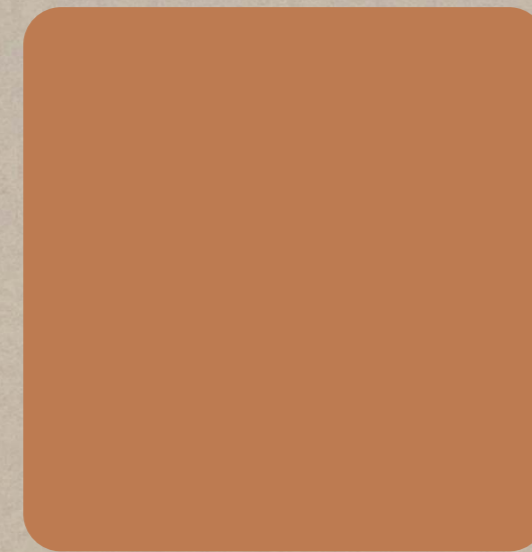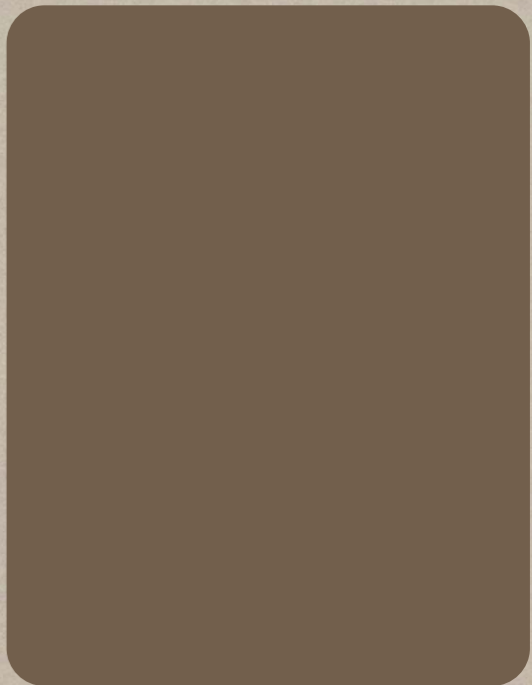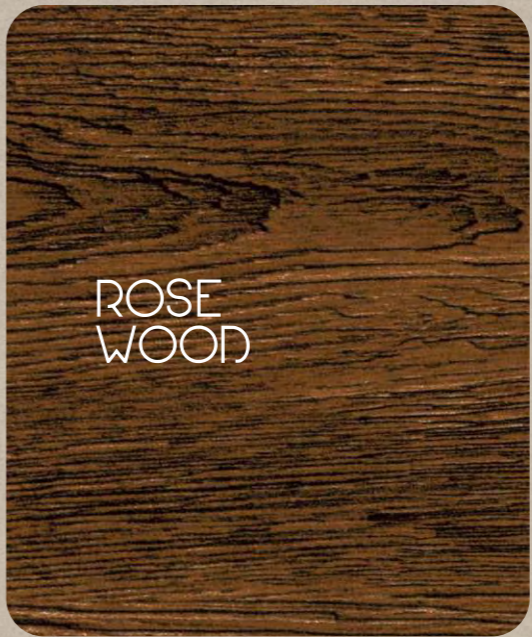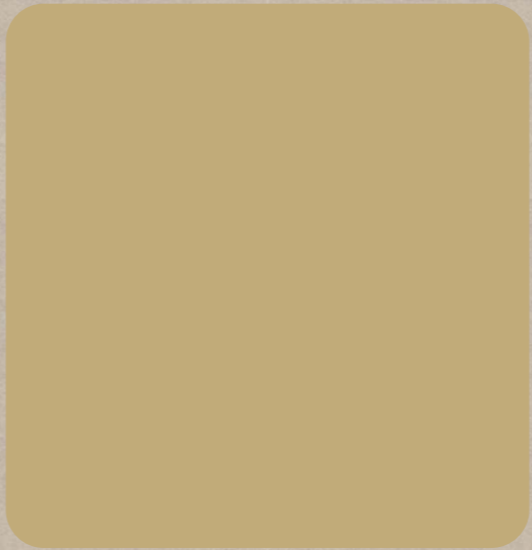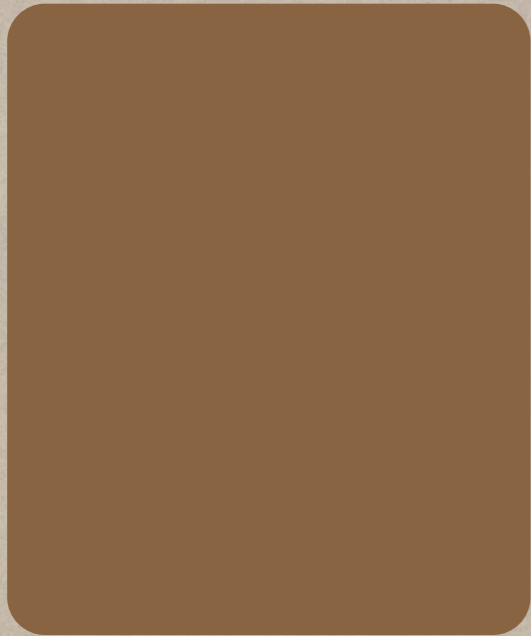



CRAFTED
INNOVATIVELY
FOR BEAUTIFUL
LIVING



COUNTRY CHEST NUT




200X
1200MM

RANDOM
10




COUNTRY CHEST NUT

PHASE - 1

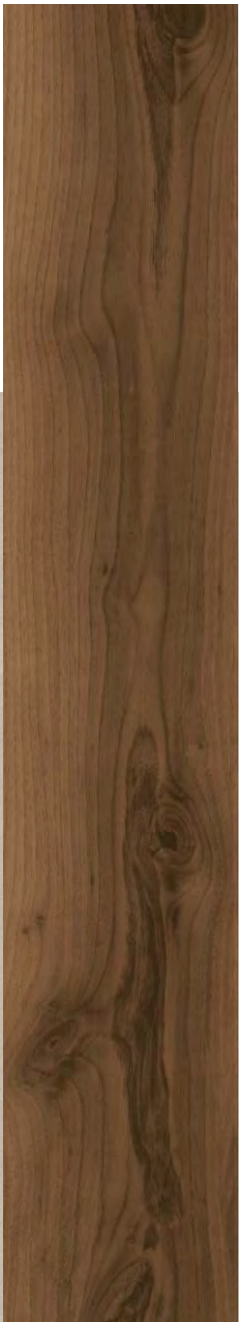

PHASE - 2

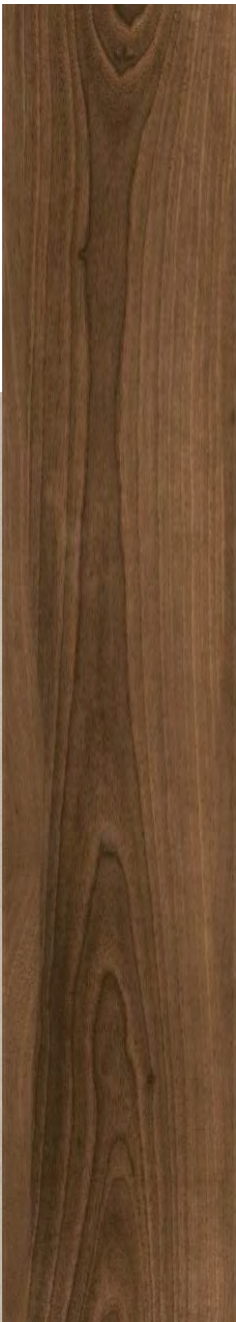

PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9



PHASE - 10



COUNTRY MAPLE




200X
1200MM

RANDOM
10



COUNTRY MAPLE


PHASE - 1

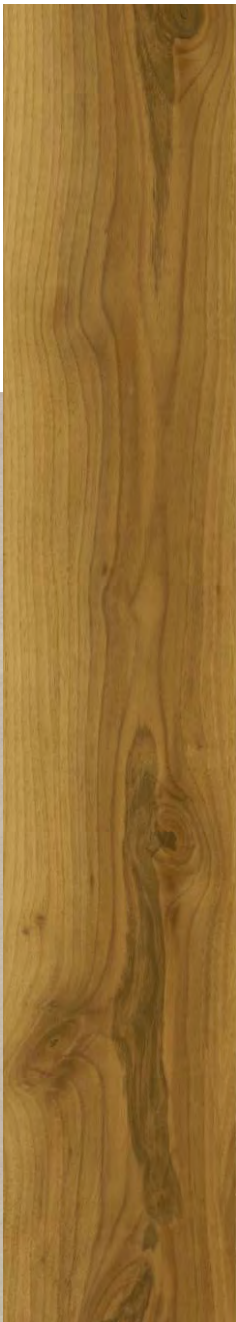

PHASE - 2



PHASE - 3


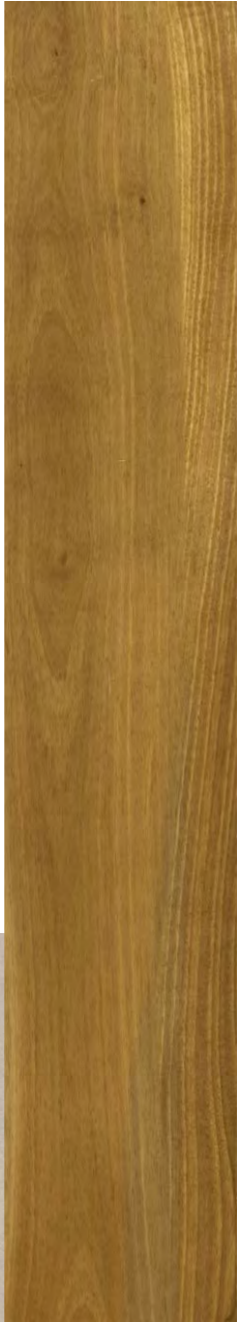


PHASE - 4

PHASE - 5



PHASE - 6

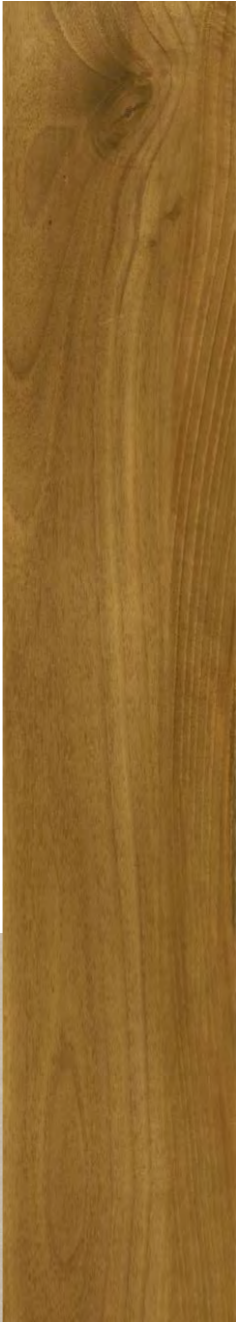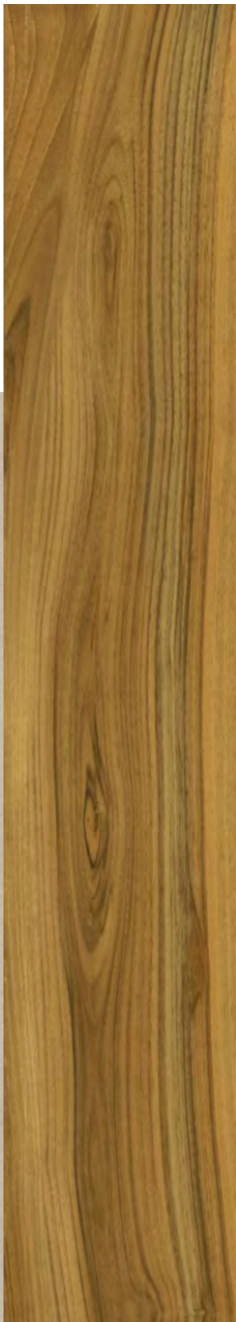

PHASE - 7




PHASE - 8

PHASE - 9



PHASE - 10

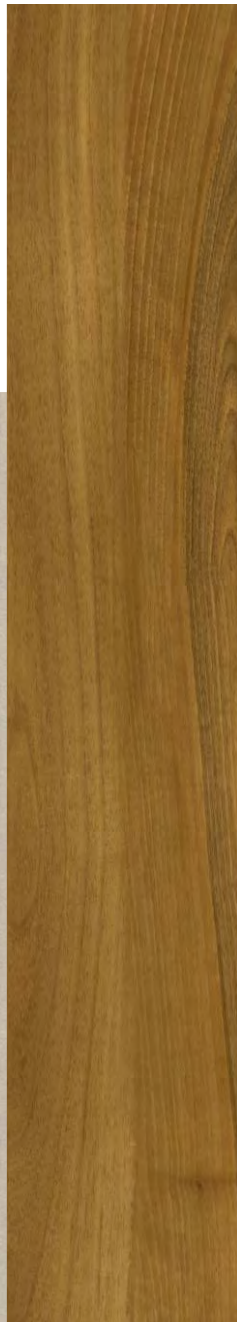

COUNTRY
RED




200X
1200MM

RANDOM
10



COUNTRY RED

PHASE - 1

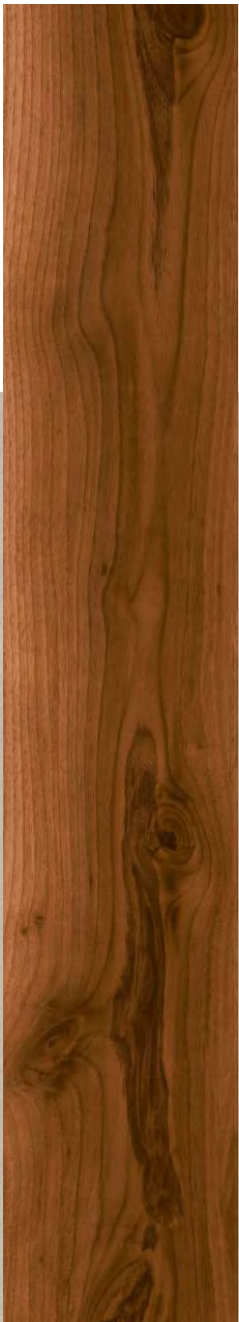

PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7




PHASE - 8

PHASE - 9



PHASE - 10

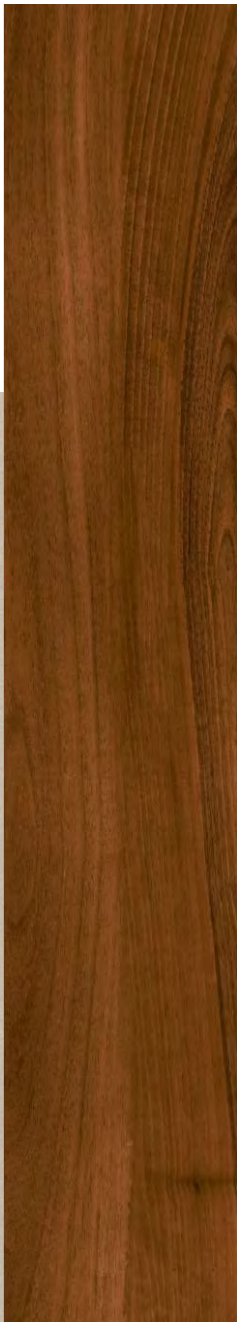

WALNUT
OAK



200X
1200MM

RANDOM
9



WALNUT OAK

PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9



GOLDEN OAK



200X
1200MM

RANDOM
9



GOLDEN OAK

PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9



NATURAL OAK



200X
1200MM

RANDOM
8



NATURAL OAK

PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

ORCHID
OAK

200X
1200MM

RANDOM
12




ORCHID OAK

PHASE - 1



PHASE - 2

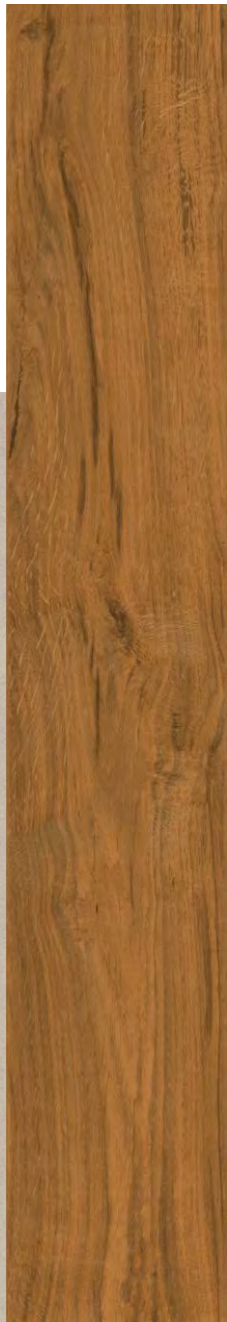

PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7




PHASE - 8

PHASE - 9



PHASE - 10

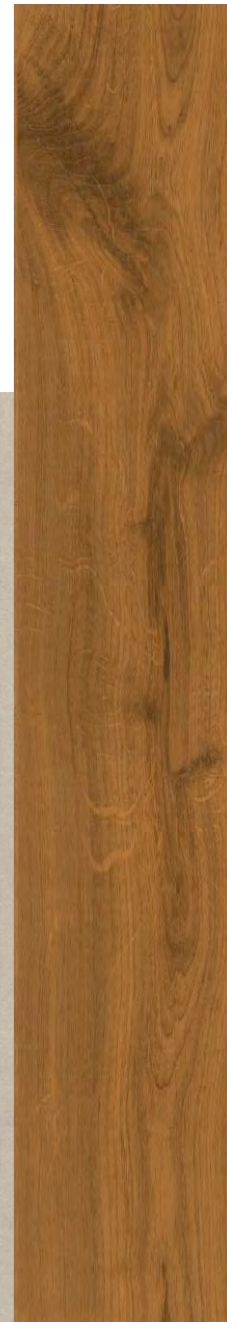

ROSE WOOD



200X
1200MM

RANDOM
9




ROSE WOOD

PHASE - 1



PHASE - 2

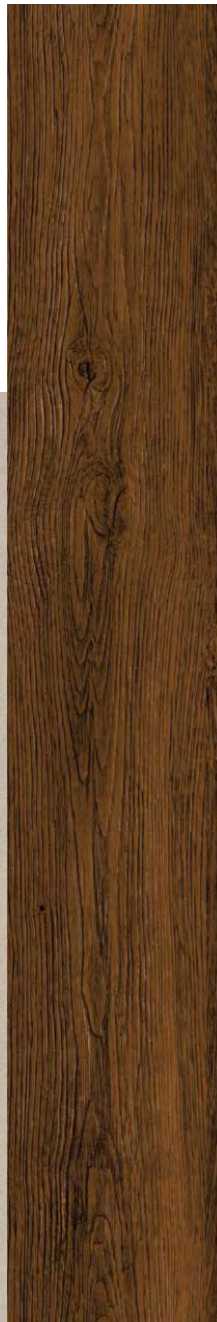

PHASE - 3




PHASE - 4

PHASE - 5



PHASE - 6

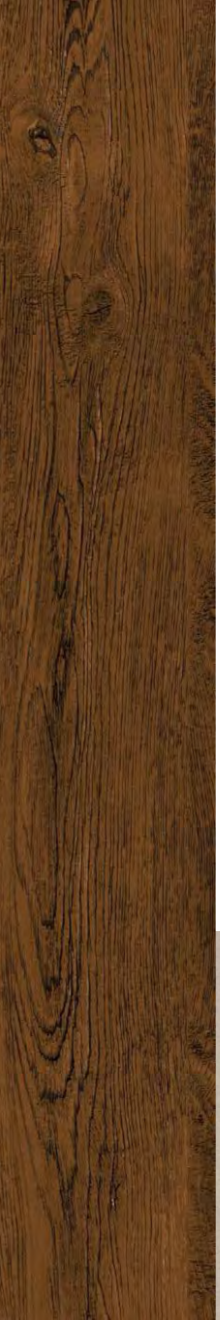

PHASE - 7



PHASE - 8

PHASE - 9



SEDONA BROWN



200X
1200MM

RANDOM
6



SEDONA BROWN

PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



SPECIAL WALNUT



200X
1200MM

RANDOM
9



SPECIAL WALNUT

PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7




PHASE - 8



PHASE - 9

LAYING SOLUTIONS

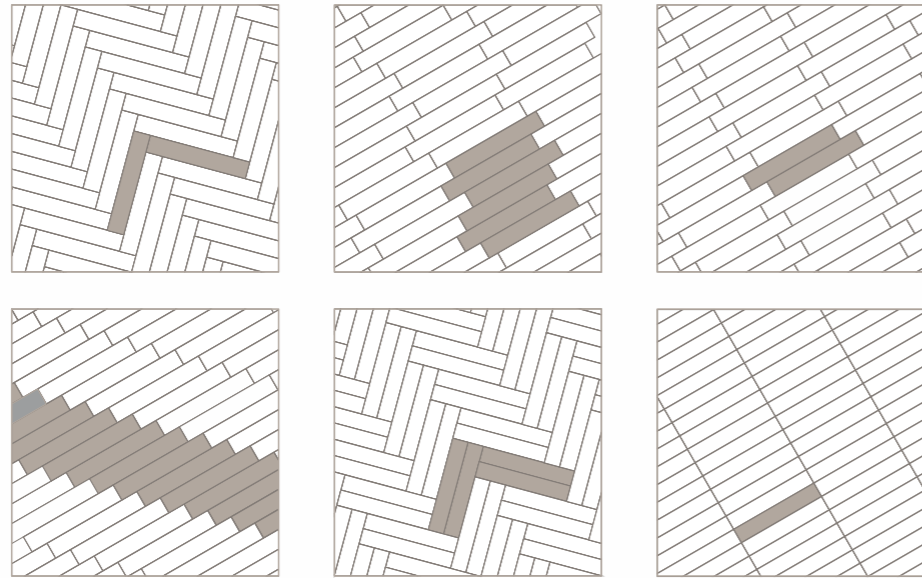


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group BIa, E ≤ 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	± 0,3%, max 1 mm	In According	
		Thickness	± 5%, max 0,5 mm	In According	
		Wedging	± 0,3%, max 1,5 mm	In According	
		Straightness of the edges	± 0,3%, max 0,8 mm	In According	
		Flatness	± 0,4%, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	≤ 0,5%	In According	
		Breaking strength	S ≥ 1300 N	S ≥ 2000 N	
		Modulus of rupture	R ≥ 35 N/mm ²	In According	
		Resistance to surface abrasion	According to classification indicator by manufacture	PEI III	
THERMAL SHOCK		Coefficient of thermal linear expansion	9 x 10 ⁻⁶ max	In According	
		Thermal shock resistance	Resistant	Resistant	
		Resistance to frost	Resistant	Resistant	
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5




INSTALLATION ADVICE

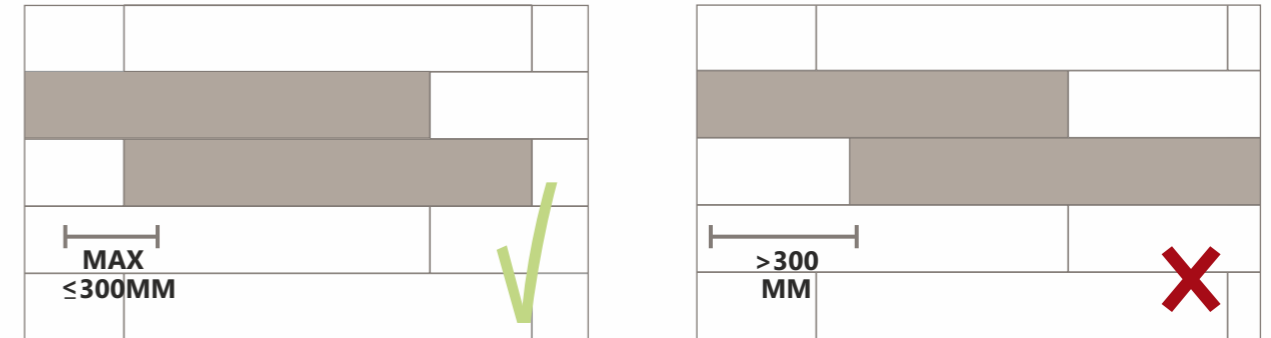

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES

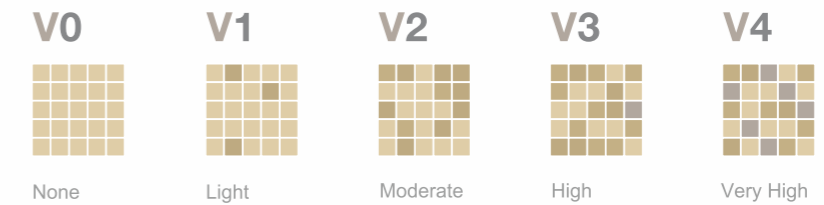

The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES



*We need minimum 2000sq/mtr order for R11 surface