

the new frontiers of ceramic tile from india





technology and infrastructure











KEOA

INTE.SA

AXA MODENA I 摩德娜

+008

5

duction Units

15+
Years Of Experience

750+ Employees

23+
Country Export





application and features

APPLICATION

INDOOR FLOORS



KITCHEN COUNTER TOPS



OUTDOOR FLOORS



INTERIOR FURNISHING AND DESIGN ELEMENTS



INDOOR WALLS



EXTERIOR FACADES



BATHROOM VANITY TOPS
AND SHELVES

FEATURES



STAIN PROOF



NON-ABSORBENT



RESISTENCE



CLEAN



DURABLE



SCRATCH RESISTENCE



RESISTANCE

HYGIEN



PROOF



RESISTENCE





200X1200MM









BOSCO BEIGE

200X1200MM / 20X120CM

RANDOMS 08


THICKNESS

9MM

FINISH

MATT RELIEF



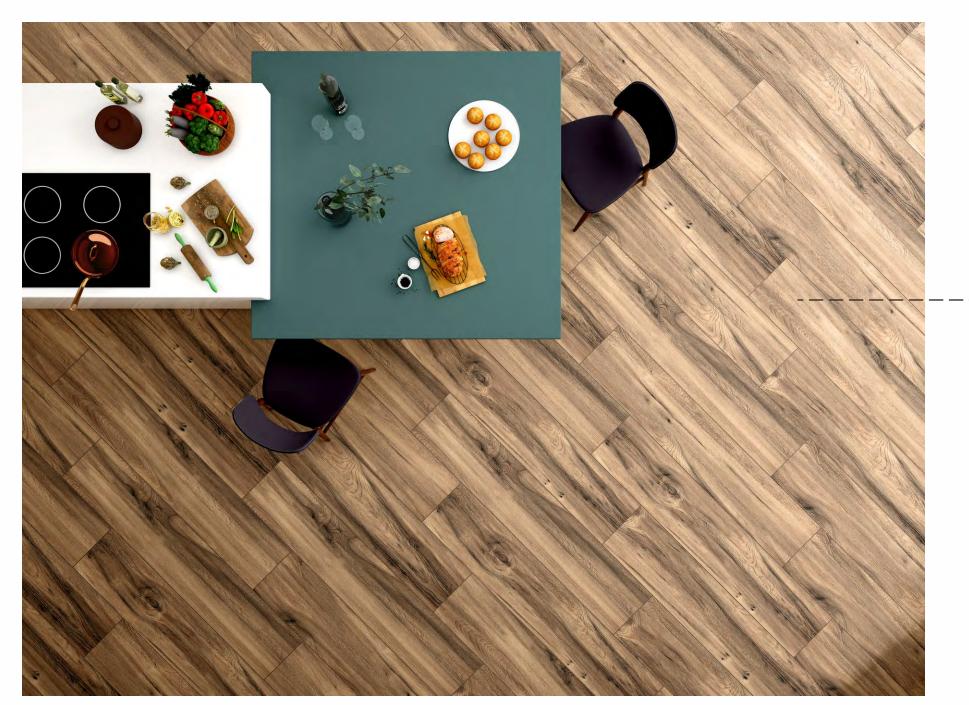

BOSCO BEIGE



BOSCO BROWN



COLORS 2





200X1200MM









TIMBER ASH

200X1200MM / 20X120CM


RANDOMS

09

THICKNESS 9MM

FINISH MATT RELIEF



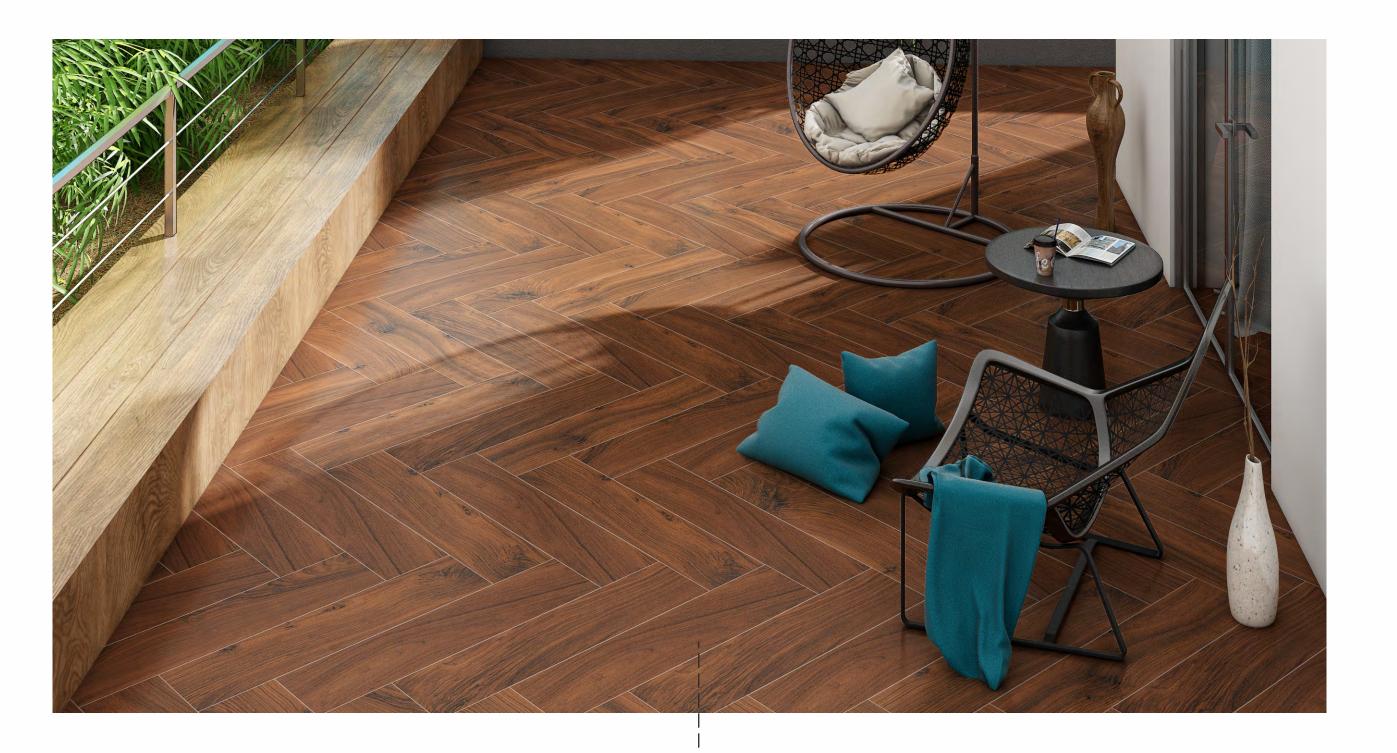





TIMBER ASH



TIMBER MAHOGANY



TIMBER WALNUT





TIMBER WALLNUT



TIMBER MAHOGANY





200X1200MM










MADEIRA OAK

200X1200MM / 20X120CM

RANDOMS

THICKNESS 9MM FINISH MATT RELIEF



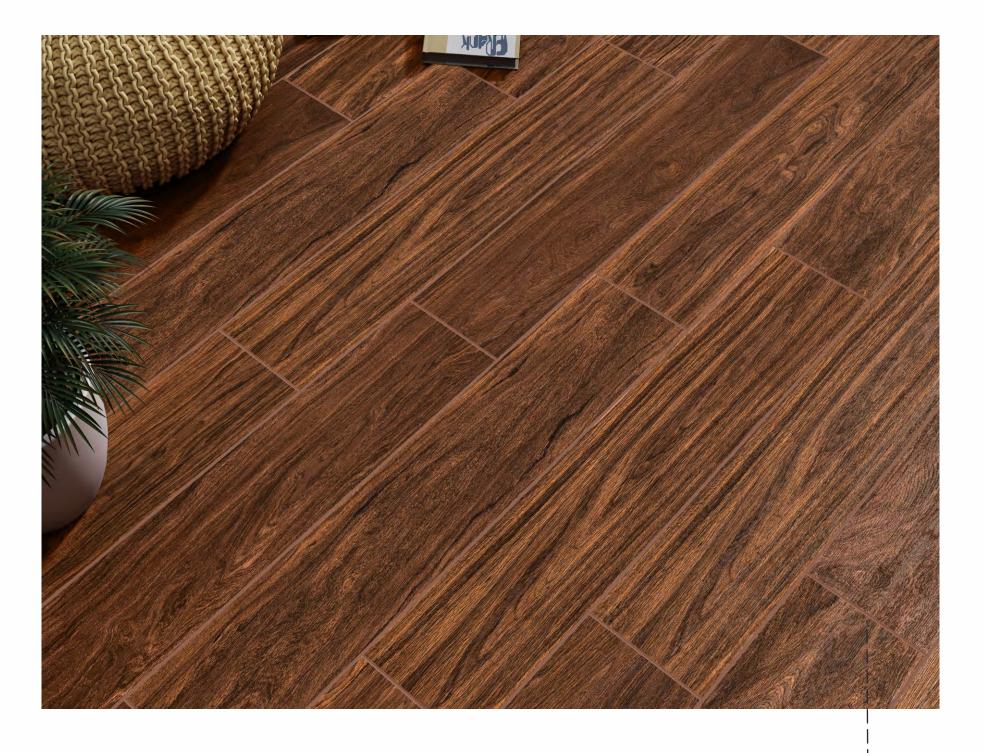

COLORS 4

MADEIRA OAK



MADEIRA PINE



MADEIRA TEAK



MADEIRA WENGE





MADEIRA PINE


MADEIRA TEAK



ΔLΡΔΙΝ



200X1200MM

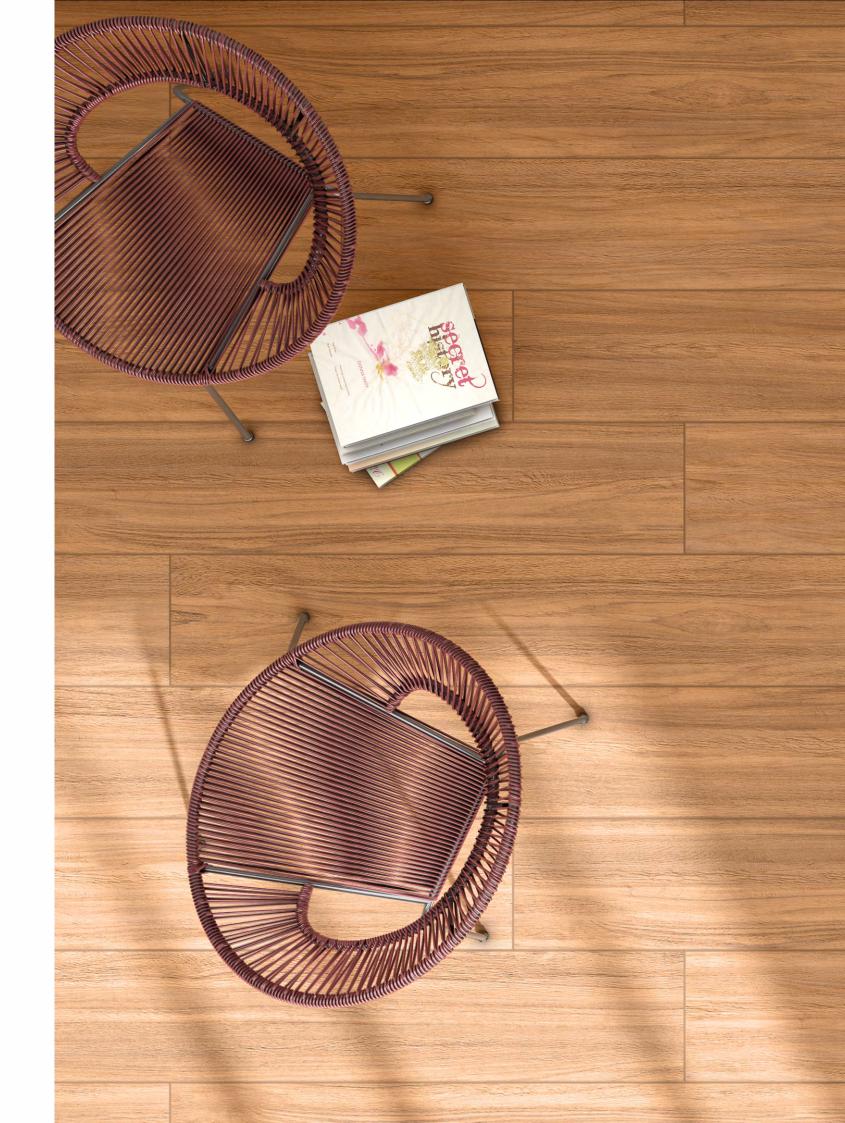





ΔΙΡΔΙΝ

ALPINE TEAK

200X1200MM / 20X120CM

RANDOMS

05

THICKNESS

9MM

FINISH

MATT RELIEF





ALPINE TEAK



ALPINE NUT



COLORS 2

ASTONE



200X1200MM







ASTONE

ASTON SILVER

200X1200MM / 20X120CM

RANDOMS 10

THICKNESS 9MM

FINISH MATT RELIEF



COLORS 2

ASTON SILVER



ASTONE PINE






BRICOLA



200X1200MM

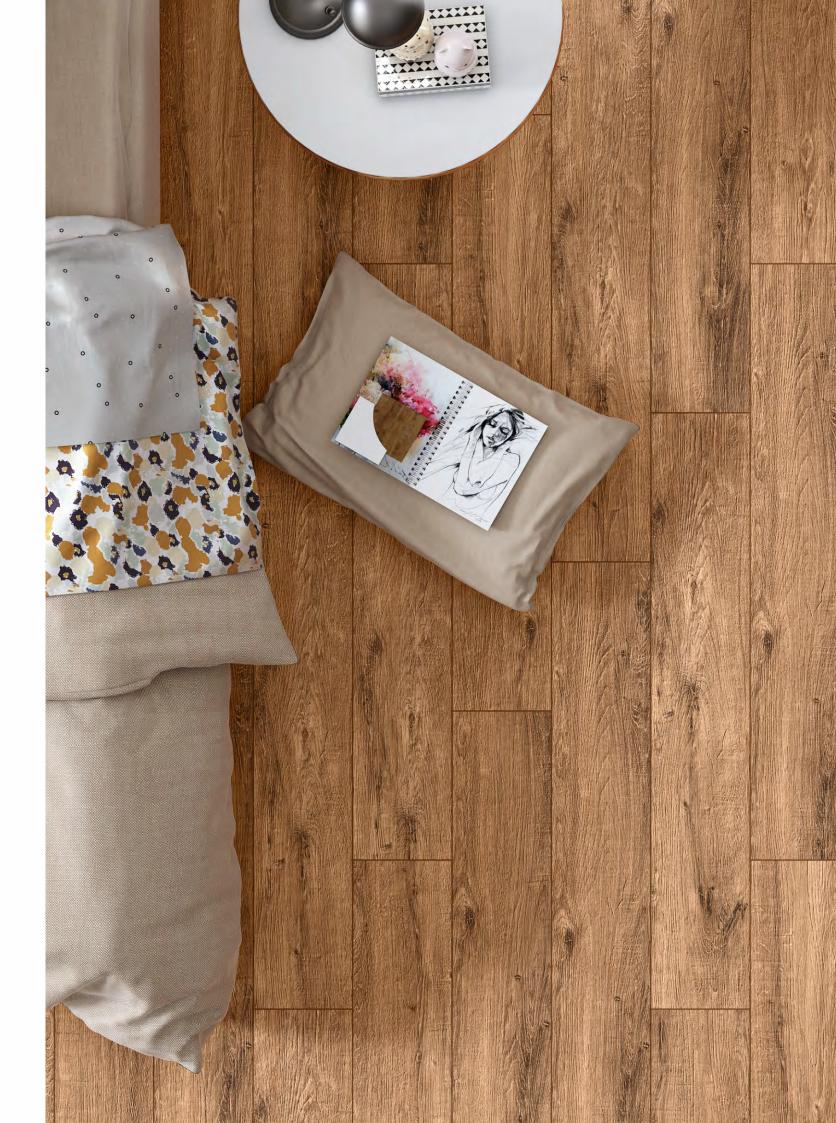





BRICOLA

BRICOLA BROWN

200X1200MM / 20X120CM


RANDOMS

THICKNESS

9MM

FINISHMATT RELIEF



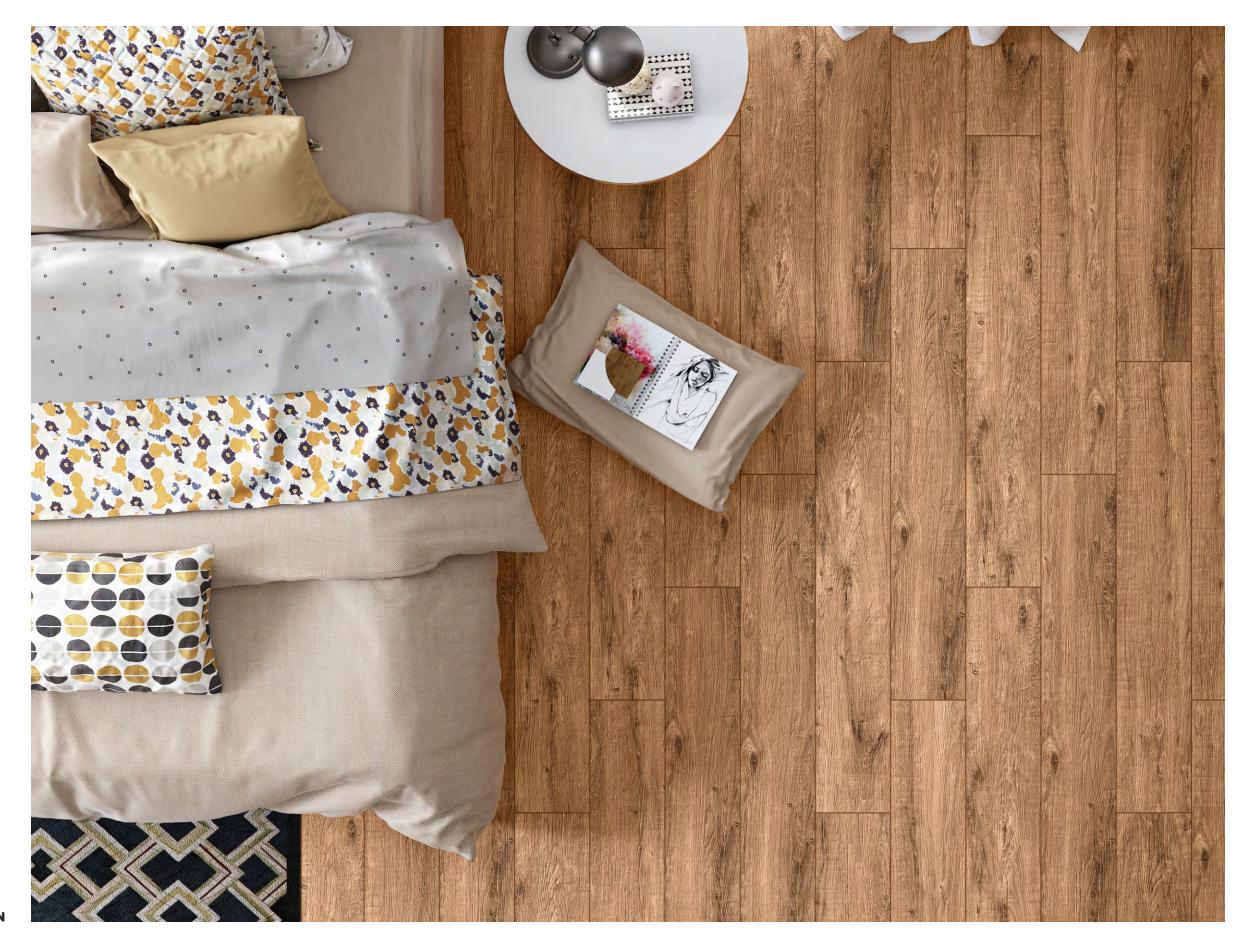

BRICOLA BROWN

LEQNO



200X1200MM







LEQNO

LEGNO MAPLE

200X1200MM / 20X120CM

RANDOMS

09

THICKNESS

9MM

FINISH

MATT RELIEF



SEQUOIA



200X1200MM









SEQUIOA CENIZA

200X1200MM / 20X120CM

RANDOMS 12

THICKNESS 9MM FINISH CARVING





SEQUIOA CENIZA



SEQUIOA OAK



SEQUIOA FOREST



COLORS 3



BALBOA



200X1200MM







BALBOA

BALBOA MOKA

200X1200MM / 20X120CM

RANDOMS

10

THICKNESS

9MM

FINISH MATT RELIEF



,

BALBOA MEHOGANY



BALBOA MOKA






BIRCHW@D



200X1200MM





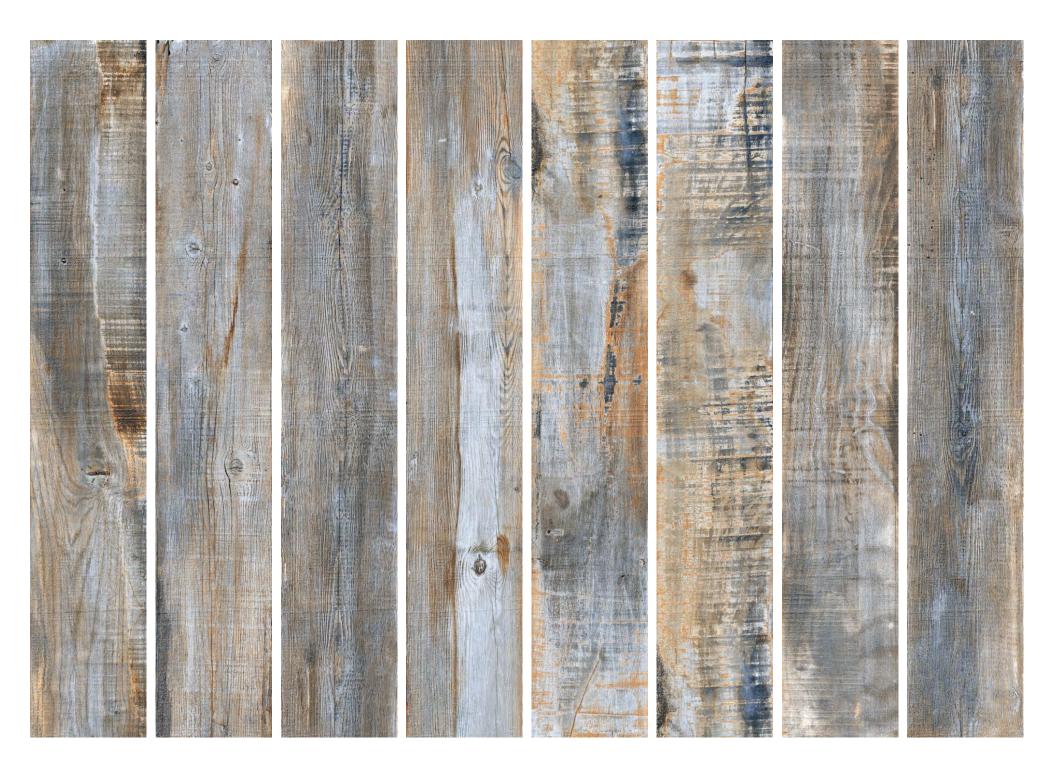

BIRCHW@D

BIRCHWOOD ANCIENT

200X1200MM / 20X120CM

RANDOMS

08

THICKNESS

9MM

FINISH MATT RELIEF



BIRCHWOOD NATURAL




BIRCHWOOD FOREST



BIRCHWOOD ANCIENT



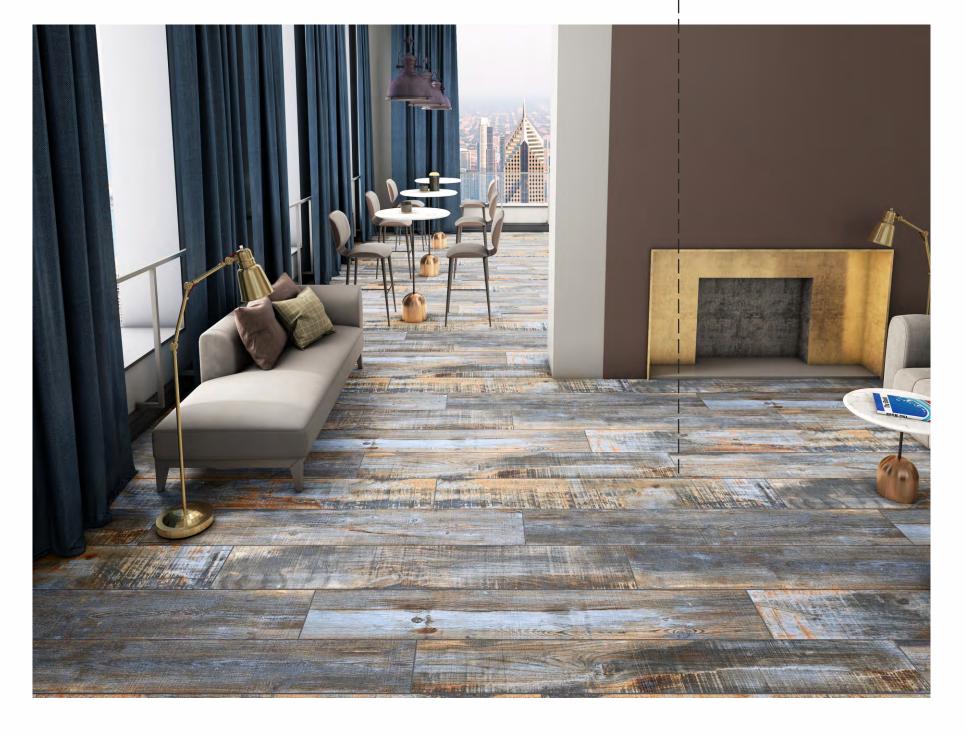

COLORS 3

DAKOTA



200X1200MM







DAKOTA

DAKOTA NATURAL

200X1200MM / 20X120CM


RANDOMS 09

THICKNESS 9MM

FINISH MATT RELIEF



COLORS 2

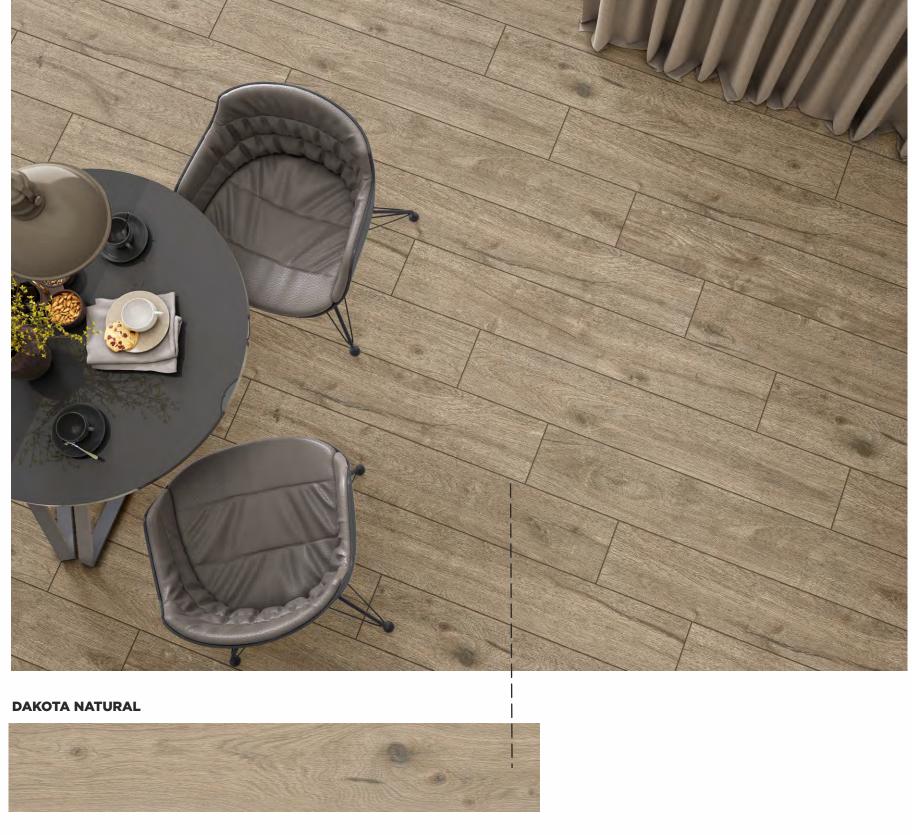

DAKOTA MAPLE



Hickory

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.



Hickory

HICKORY WENGE

200X1200MM / 20X120CM

RANDOMS

07

THICKNESS

9MM

FINISH MATT



Lyptus



200X1200MM







Lyptus

LYPTUS NUEZ

200X1200MM / 20X120CM

RANDOMS 08

THICKNESS

9MM

FINISH MATT



COLORS 2

LYPTUS NUEZ



LYPTUS TEAK





CALDERA



200X1200MM







CALDERA

CALDERA GREY


200X1200MM / 20X120CM

RANDOMS 07

THICKNESS 9MM

FINISH MATT RELIEF



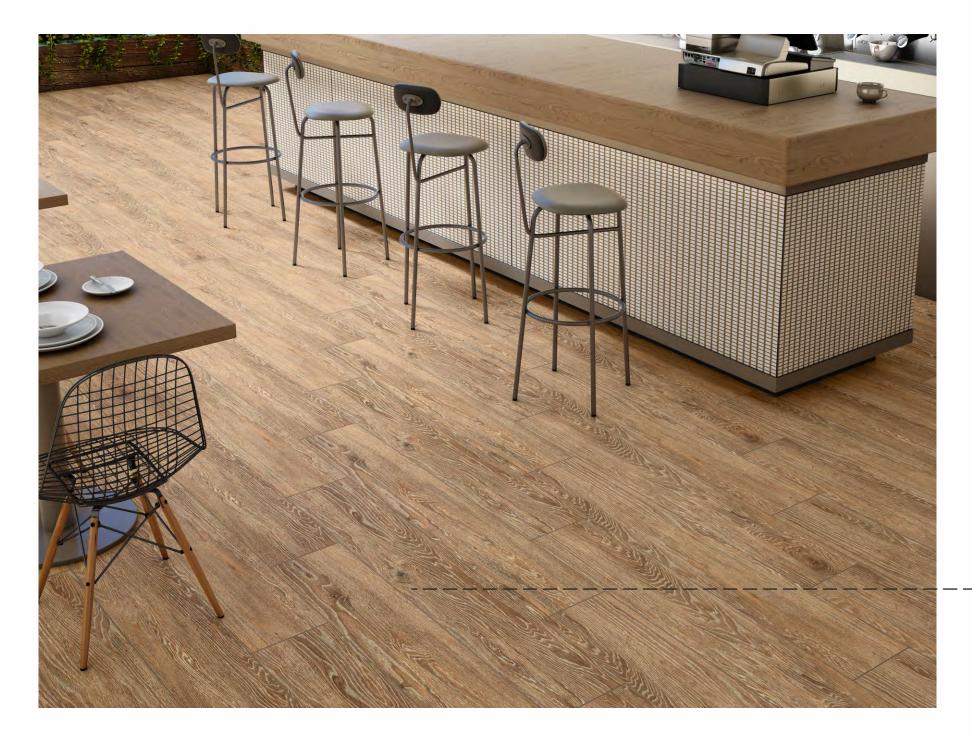

CALDERA PINE



CALDERA AMBER



CALDERA OAK



COLORS 6





MISSOURI

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.



MISSOURI

MISSOURI PEACH

200X1200MM / 20X120CM

RANDOMS

10

THICKNESS

9MM

FINISH MATT RELIEF



MOHAWK



200X1200MM







MOHAWK

MOHAWK NATURAL

200X1200MM / 20X120CM

RANDOMS


08

THICKNESS

9MM

FINISH MATT RELIEF



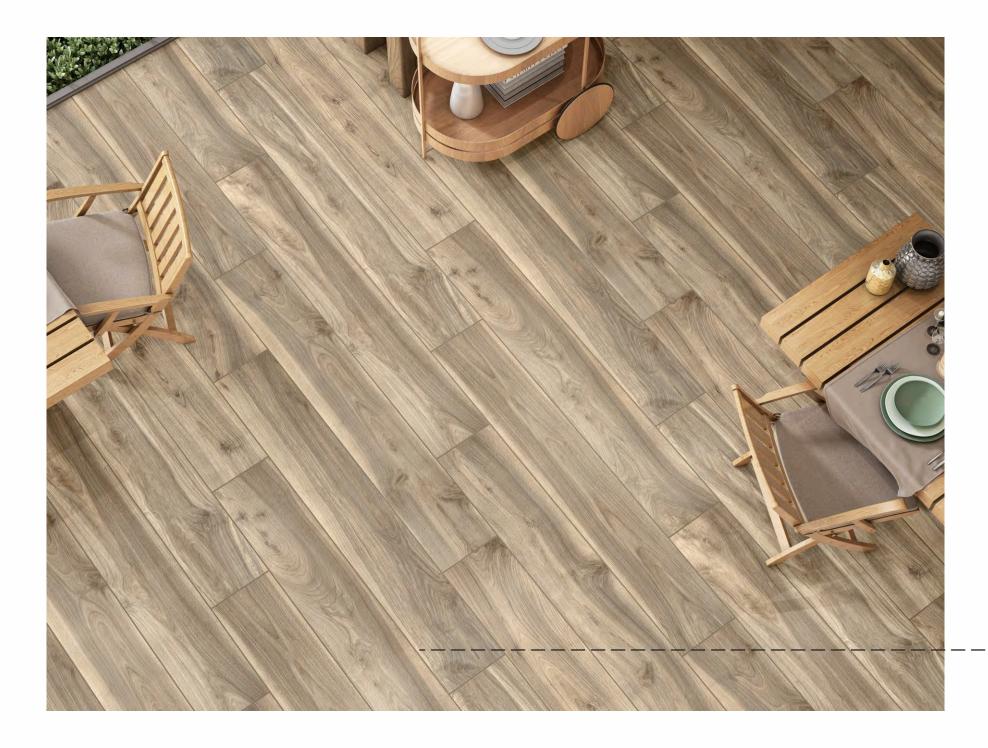

MOHAWK NATURAL



MOHAWK WALNUT




COLORS 2

BOHEMIAN



200X1200MM

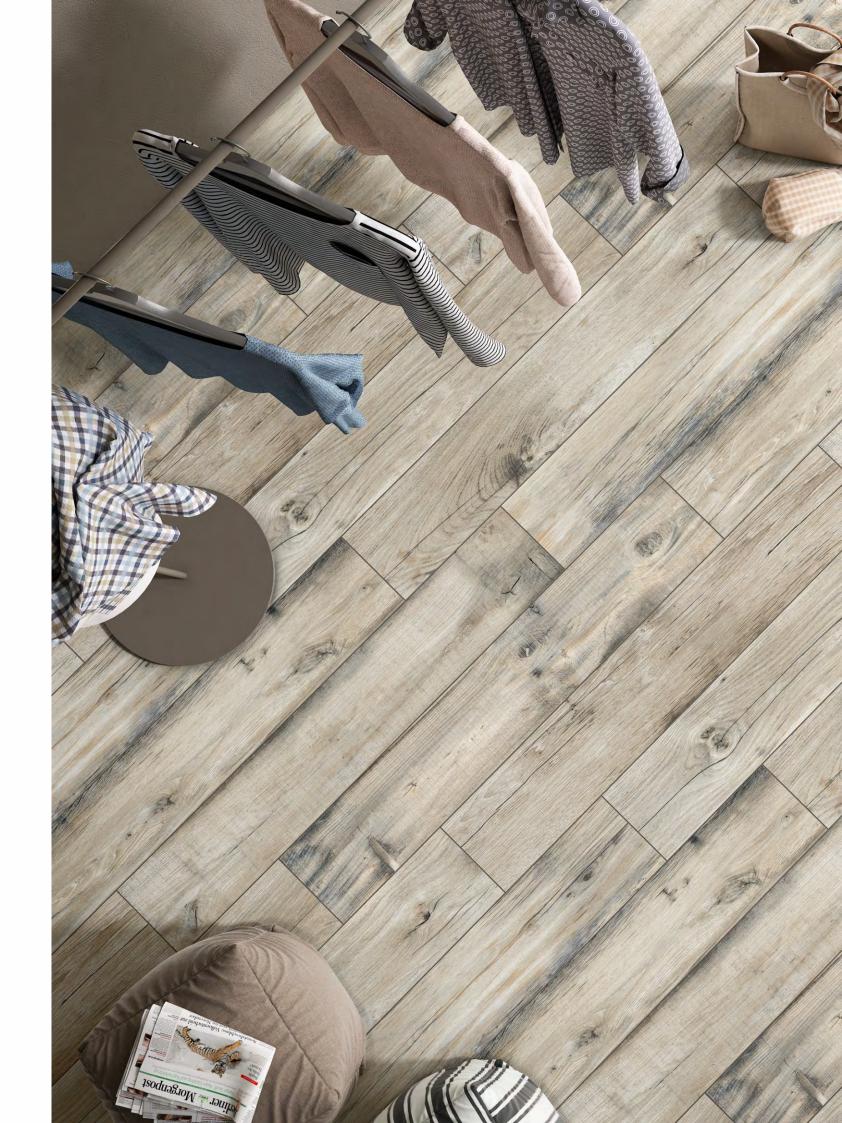





BOHEMIAN

BOHEMIAN WHITE OAK

200X1200MM / 20X120CM

RANDOMS 07

THICKNESS

9MM


FINISH CARVING



COLORS 3

BOHEMIAN WHITE OAK



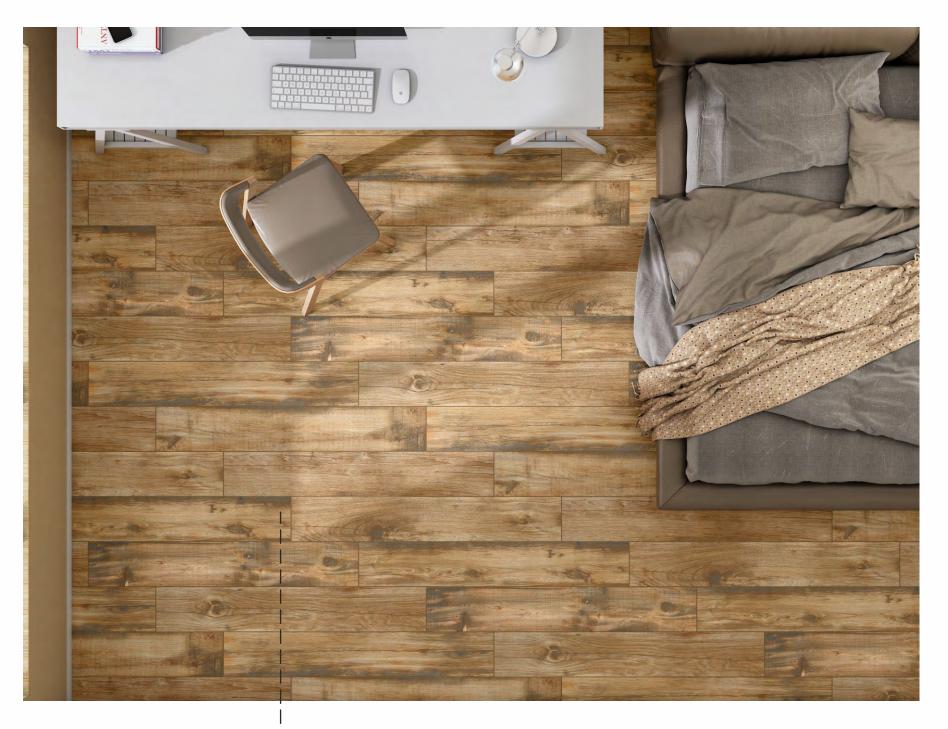

BOHEMIAN PEACH



BOHEMIAN BROWN



HABANA



200X1200MM







HABANA

HABANA BLACK

200X1200MM / 20X120CM

RANDOMS


10

THICKNESS

9MM

FINISH CARVING



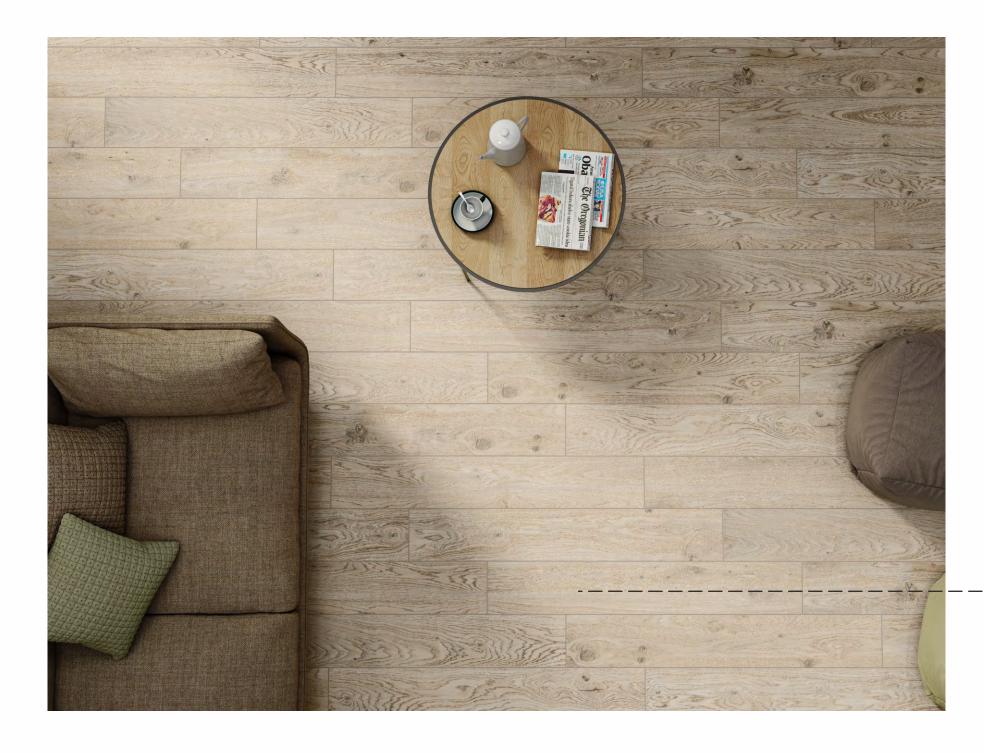

COLORS 4

HABANA GREY



HABANA NATURAL



HABANA ROBLE



HABANA BLACK





NEST



200X1200MM







NEST

NEST OAK

200X1200MM / 20X120CM

RANDOMS 10

0

THICKNESS 9MM

FINISH CARVING



NEST PINE



COLORS 4

NEST FOREST



NEST OAK



NEST GREY





HOUSTAN COSTANO



200X1200MM







HOUSTANCOSTANO

NEST OAK

200X1200MM / 20X120CM


RANDOMS 10

THICKNESS 9MM

FINISH CARVING



LAYING SOLUTIONS

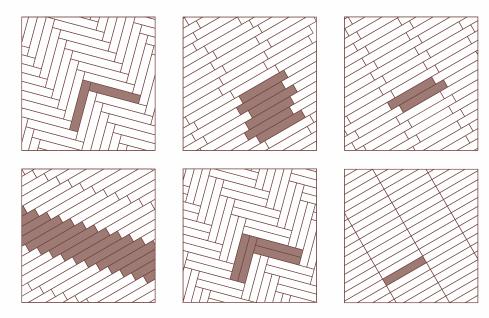

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.


GVT STONEWARE - STANDARD EN 14411 (ISO 13006) ANNEX G GROUP BIA, E \leq 0.5%

TECHNICAL SPECIFICATIONS				VALUES REQUIRED	OUR VaLUES
				RECTIFIED	MATT
		Length and width	ISO 10545-2	<u>+</u> 0,3%, max 1 mm	In According
DIMENSIONS		Thickness		<u>+</u> 5%, max 0,5 mm	In According
		Wedging		<u>+</u> 0,3%, max 1,5 mm	In According
		Straightness of the edges		<u>+</u> 0,3%, max 0,8 mm	In According
		Flatness		<u>+</u> 0,4%, max 1,8 mm	In According
	• •	Water absorption – average value %	ISO 10545-3	≤ 0,5%	In According
STRUCTURE		Breaking strength		S≥ 1300 N	S <u>></u> 2000 N
		Modulus of rupter	ISO 10545-4	R≥ 35 N/mm²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicater by manufacture	PEI IV
	113	Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 ⁻⁶ max	In According
THERMAL SHOCK		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9
	•	Resistance to high concentrations of acids and alkalis		Class GHC Min.	Class GHA
CHEMICAL RESISTANCE		Resistance to low concentrations of acids and alkalis	ISO 10545-13	Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5





INSTALLATION ADVICE

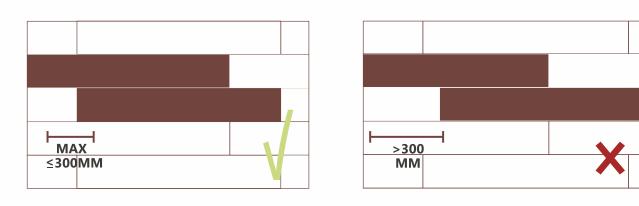

The longest side should be staggered no more than 300mm when laid in running bond.



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES

